


#makeweldingsimpleagain



WELDING TABLES WITH HYDRAULIC LIFTING SYSTEM

XWT SERIES

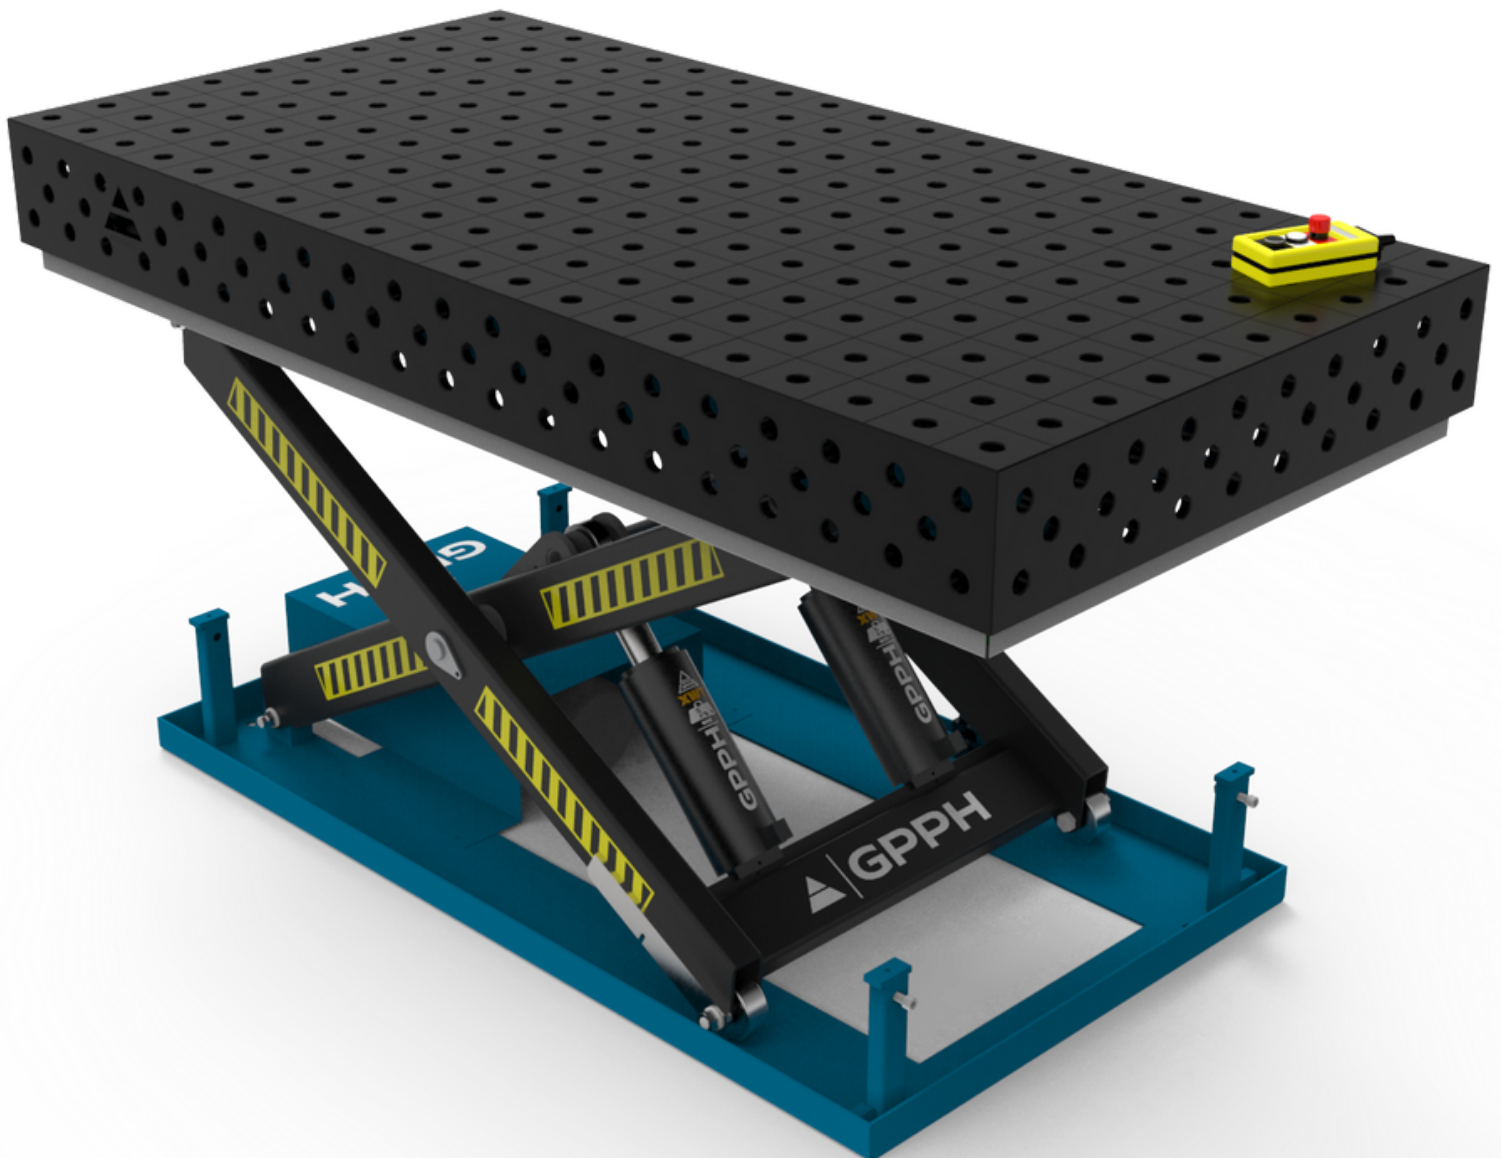

TECHNICAL PARAMETERS

GPPH welding tables with hydraulic lifting system are professional tables with automatic adjustment of table top height.

With it you will quickly and easily reach the ideal working height of the table top ensuring high comfort of work.













Welding tables with hydraulic lifting system are equipped with:

- overload valve preventing lifting too heavy loads;
- safety valve stopping the lowering in the case of rupture of the hydraulic lines;
- limit switches protecting against crushing or personal injury.

Welding tables with hydraulic lifting system are available in three series of GPPH welding tables. **PRO**, **PLUS**, and **ECO**, and each of the series are available in 9 dimensions: 1000x600 mm, 1000x1000 mm, 1200x800 mm, 1200x1000 mm, 1200x1200 mm, 1500x1000 mm, 1500x1480 mm, 2000x1000 mm, 2400x1200 mm.

Furthermore, each table top is available with fi 28 mm holes in the grids: 100x100 mm and diagonal, and in the fi 16 mm holes system in the grids: 50x50 mm, 100x100 mm and diagonal.

Check the differences between the individual series in the following table:

PARAMETER	PRO SERIES	PLUS SERIES	ECO SERIES
The ideal flatness of table [0.1 mm/ m]			
3 rows of holes in the side wall			
The thickness of table top	15 [mm]	12 [mm]	8 [mm]
Milled/chamfered holes			
Milled table top edges			
Number of dimension versions	9 dimensions	9 dimensions	9 dimensions

TECHNICAL PARAMETERS

Technical parameters of the base with hydraulic lifting system:


- supply voltage: 400 V
- revolutions: 1400 rpm
- protection class: IP54
- insulation class: F

Table dimensions [mm]	Max. load capacity [kg]	Lifting time with a load [s]	Max. table height [mm]	Min. table height [mm]	Dimensions of the base of the lifting [mm]	Motor power [kW]
1000x600	650	20-25	1140	435	1240x640	1.1
1000x1000						
1200x800						
1200x1000						
1200x1200						
1500x1000	1600	20-25	1150	460	1220x785	2.2
1500x1480	1500	20-25	1450	480	1600x785	2.2
2000x1000	3500	30-40	1200	470	1600x900	2.2
2400x1200	3400	45-55	1550	530	1980x930	2.2

TECHNICAL PARAMETERS

Weights of the GPPH welding tables with hydraulic lifting system


Table dimensions [mm]	Weight of XWT with table top from the PRO Series [kg]	Weight of XWT with table top from the PLUS Series [kg]	Weight of XWT with table top from the ECO Series [kg]
1000x600	356	316	256
1000x1000	426	376	296
1200x800	416	366	286
1200x1000	466	406	316
1200x1200	496	426	336
1500x1000	638	568	468
1500x1480	779	679	559
2000x1000	865	775	655
2400x1200	1135	1015	845

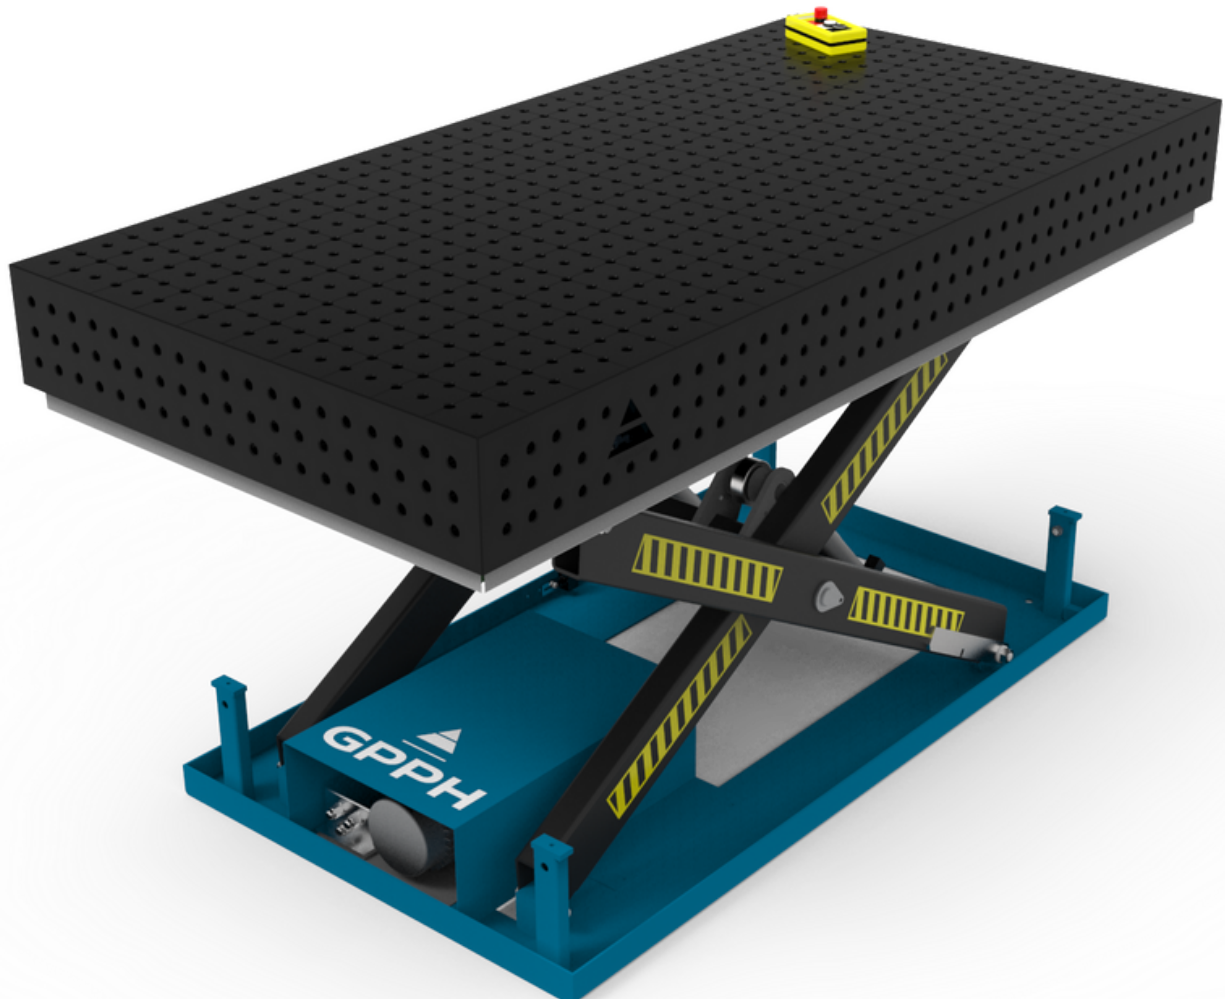

THANK YOU FOR YOUR TIME SPENT READING OUR OFFER

WE HOPE THAT OUR COOPERATION WILL BE SUCCESSFUL.

IF YOU HAVE ANY QUESTIONS, I CAN OFFER MY ASSISTANCE AND
EXPERIENCE.

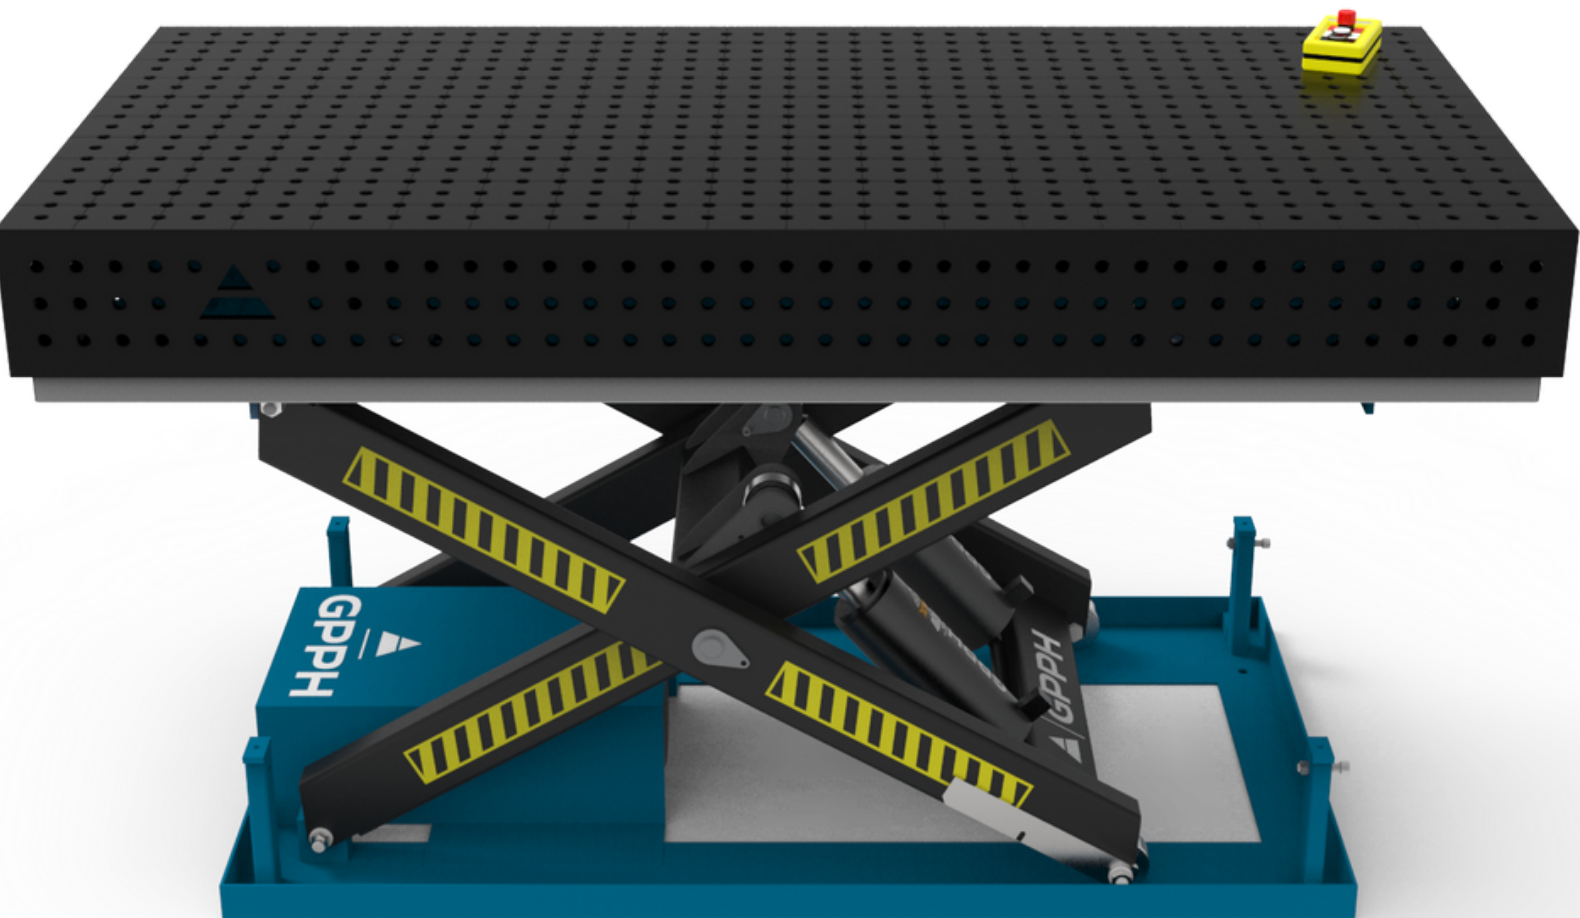


#makeweldingsimpleagain

THANK YOU FOR YOUR TIME SPENT READING OUR OFFER

WE HOPE THAT OUR COOPERATION WILL BE SUCCESSFUL.

IF YOU HAVE ANY QUESTIONS, I CAN OFFER MY ASSISTANCE AND
EXPERIENCE.

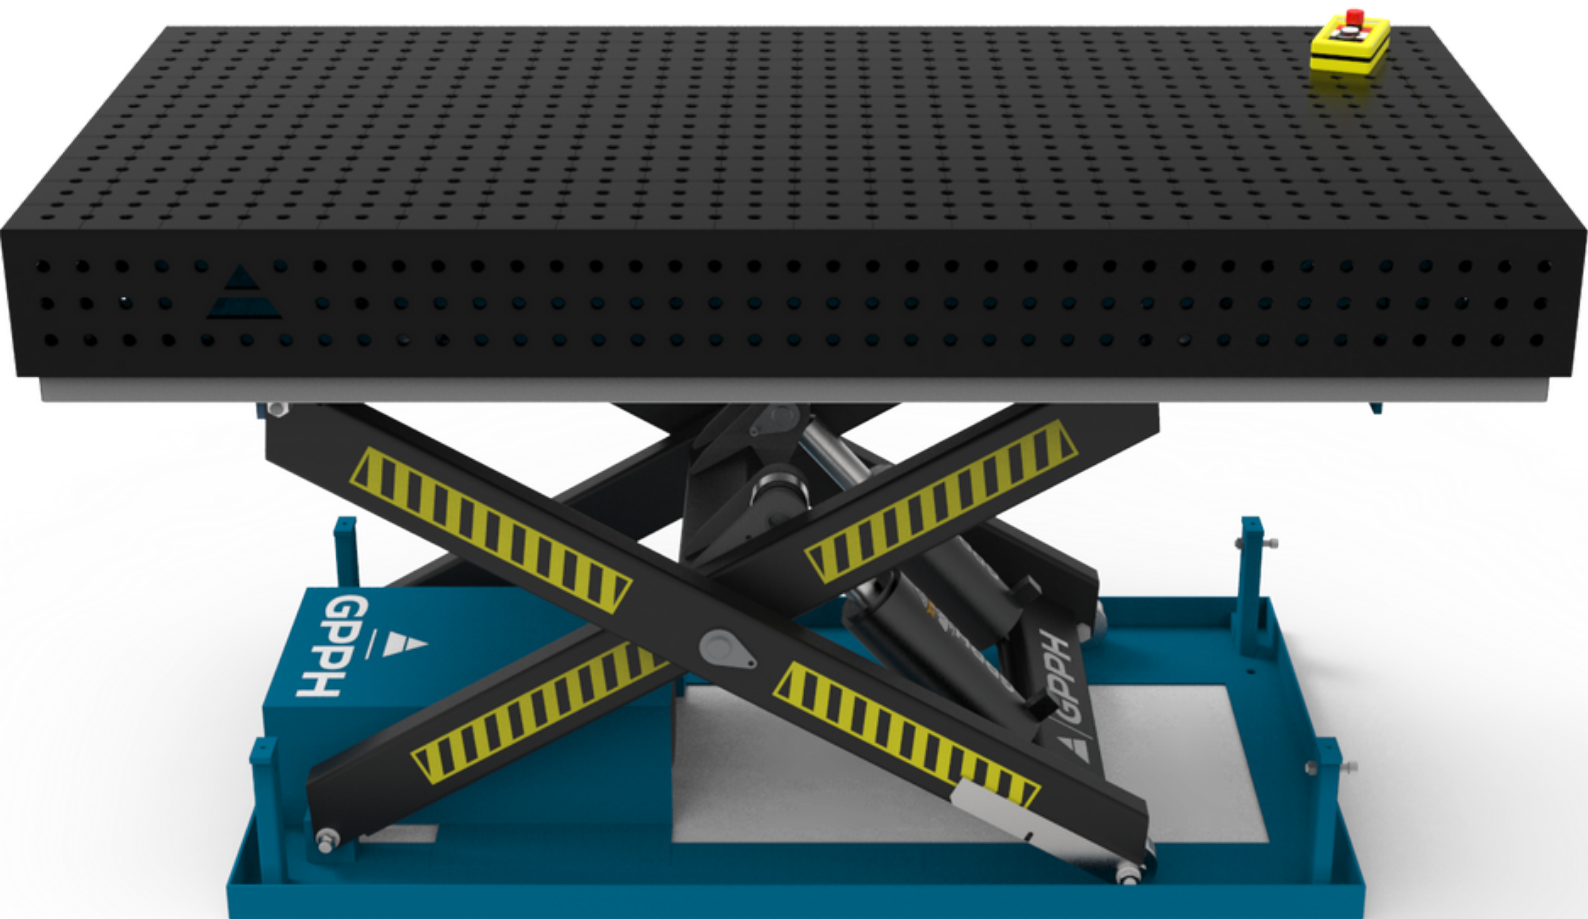

#makeweldingsimpleagain