


FX Permanent Lifting magnets

FX Universal Permanent Lifting magnet

FX lifting magnets in standard version convince with their wide range of applications. The FX achieved good results at both, a large air gap as well as thin flat and round materials. It has a compact design and low own weight. The device is characterized by great robustness and a very good price/performance ratio.

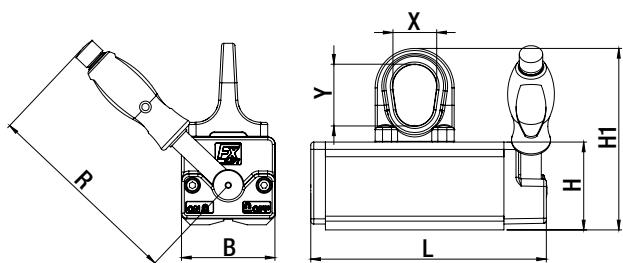

Model	Article-Nr.	Max. Load capacity (kg) flat round	Max. Load capacity from (mm)	L	Dimensions (mm)					Weight (kg)	Price excl. VAT.	
					B	H	H1	R	X/Y			
FX-150	1101 0150	150 kg	Ø50-200 mm 75 kg	8	161	64	60	124	136	30/42	3,6	388,-
FX-300	1101 0300	300 kg	Ø50-300 mm 150 kg	15	205	87	78	158	190	42/53	8,4	498,-
FX-600	1101 0600	600 kg	Ø80-400 mm 300 kg	20	288	112	94	189	228	51/62	19	798,-
FX-1000	1101 1000	1000 kg	Ø100-450 mm 500 kg	25	361	152	120	240	261	60/76	42	1.298,-
FX-2000	1101 2000	2000 kg	Ø120-600 mm 1000 kg	50	472	228	169	313	409	68/89	115	2.398,-
FX-3000	1101 3000	3000 kg	Ø250-600 mm 1500 kg	50	648	228	169	313	534	68/89	166	3.598,-

Safety factor 3,5/Test method EN 13155

max. Operation temperature 80°C • Load charts and Safety from Page 36